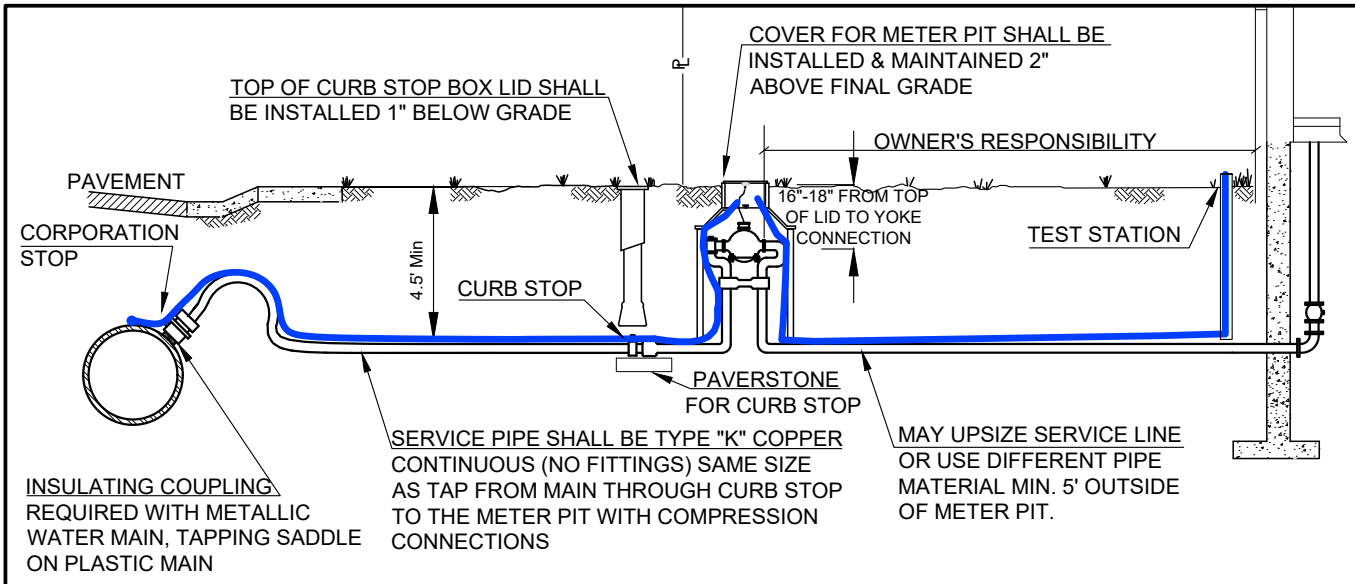

TAPPING NOTES:

1. CONTRACTOR RESPONSIBLE FOR MAKING ALL TAPS.
2. TAPS MUST BE MADE IN THE PRESENCE OF AN NTM INSPECTOR.
3. ALL TAPS ON PVC WATER MAINS REQUIRE PRIOR INSTALLATION OF TAPPING SADDLES.
4. A HAND HELD DRILL CANNOT BE USED ON PVC PIPE. ONLY A MANUALLY OPERATED CUTTING TOOL WILL BE ALLOWED.
5. PVC TAPS MUST BE MADE ACCORDING TO THE UNI-BELL TAPPING GUIDE FOR PVC PRESSURE PIPE.

CONTRACTOR SUPPLIED MATERIALS:

1. CURB STOP - MUELLER (B25209)
2. SERVICE LINE - TYPE "K" COPPER (CONTINUOUS, NO FITTINGS)
3. CURB BOX - TYLER SERIES 6500 W/ ADJUSTABLE SERVICE BOX (#94E)
4. METER PIT - CONCRETE 2' DIAMETER X 4' DEEP
5. CAST IRON DOME/FRAME
6. METER PIT COVER - 11.5" PLASTIC LID W/ 2" PREDRILLED HOLE FOR METER POD AND INNER FROST SHIELD
7. BEDDING MATERIAL - WASHED SAND OR SQUEEGEE MATERIAL
8. CORPORATION STOP - MUELLER B-25008 ON PLASTIC MAINS; MUELLER B-25000 ON DUCTILE IRON MAINS
9. TAPPING CIP/DIP MAIN USE INSULATOR - $\frac{3}{4}$" TAP - FORD SI-3-NL; 1" TAP - FORD SI-4-NL
10. SADDLE ON PVC MAINS - MUELLER H-13000 SERIES- OR APPROVED EQUAL
11. TRACER WIRE - PER STANDARD DETAIL W-11
12. TEST STATION - CP SERVICES, GLENN 4 - BOX WITH LOCKING LID
13. PAVER STONE - 6" x 6" TO SUPPORT CURB STOP BOX

GENERAL NOTES:

1. UTILITY PERMIT IS REQUIRED PRIOR TO COMMENCEMENT OF SERVICE LINE INSTALLATION.
2. A $250 FINE WILL BE ASSESSED IF THE DISTRICT IS UNABLE TO SET A METER DUE TO METER PIT ASSEMBLY DAMAGE, YOKE IMPROPERLY INSTALLED OR ANY OTHER REASON THAT PREVENTS THE PROPER INSTALLATION OF A METER. THE METER WILL NOT BE SET UNTIL FINES ARE PAID AND PROPER REPAIRS ARE MADE.
3. WATER SERVICE LOCATIONS SHALL BE PERMANENTLY MARKED ON THE FACE OF THE CURB WITH A “W” STAMPED IN WET CONCRETE.
4. METER PITS AND CURB STOPS ARE NOT ALLOWED IN DRIVEWAYS OR CONCRETE.
5. SERVICE LINES ARE NOT ALLOWED UNDER DRIVEWAYS.
6. SERVICE LINE BEDDING MATERIAL SHALL BE INSTALLED A MINIMUM 6" BELOW TO A MINIMUM OF 6" OVER SERVICE. THE BEDDING MATERIAL SHALL EXTEND THE ENTIRE LENGTH OF THE SERVICE LINE.
7. TRACER WIRE (STANDARD DETAIL W11) MUST BE INSTALLED ON ALL SERVICE LINES, ACCESSIBLE IN METER PIT AND TERMINATED IN BOX AT FOUNDATION.
8. USE OF A SPACE BAR IS **PROHIBITED**, IF ONE IS USED CONTRACTOR WILL BE **FINED** $250 FOR THE FIRST OFFENSE.
9. SOIL AMENDMENT SPECIFICATIONS ARE APPLICABLE FOR DEVELOPMENTS LARGER THAN 2 LOTS. METER WILL NOT BE SET UNTIL SPECS ARE MET.
10. A MINIMUM OF 24 HOURS NOTICE IS REQUIRED FOR INSPECTIONS, TAPS AND METER SETS.
11. NO TRENCH SHALL BE BACKFILLED UNTIL THE ENTIRE SERVICE LINE HAS BEEN INSPECTED AND APPROVED BY THE DISTRICT.
12. FOR ALL SERVICE LINE STUB-INS:
    - 12.1. MUST INSTALL CURB STOP WITH CURB BOX.
    - 12.2. EXTEND INTO THE PROPERTY A MINIMUM TEN (10) FEET.
    - 12.3. BRING COPPER PIPE TO GRADE AND TAPE END. MARK END OF STUB OUT WITH A BLUE STEEL TEE POST.

DISTRICT SUPPLIES YOKE AND METER

REV. DATE:	10/2026	¾" AND 1" WATER SERVICE LINE
SCALE:	N.T.S.	

NTM NORTH TABLE MOUNTAIN WATER AND SANITATION DISTRICT
14806 WEST 52ND AVENUE GOLDEN, COLORADO 80403-1228

DWG. NO. W6

P:\Engineering\Standard Drawings\Standard drawing.dwg, 10/12/2026 11:55:25 AM